Swan 44 chain plate arrangements

NOTE THE HULL IS REINFORCED WITH 8 MATS 450 GR/m² DOWN TO THE DWL, (BEAM 450 MM OF THE MATS) BETWEEN THE HULL AND CHAINPLATE KNEE

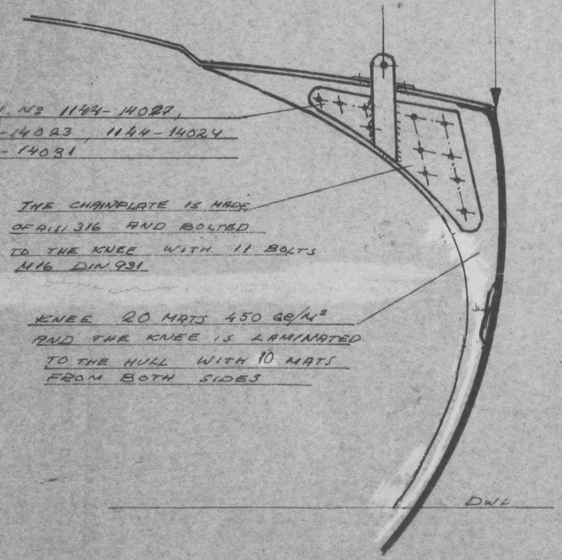

UPPER SHROUD

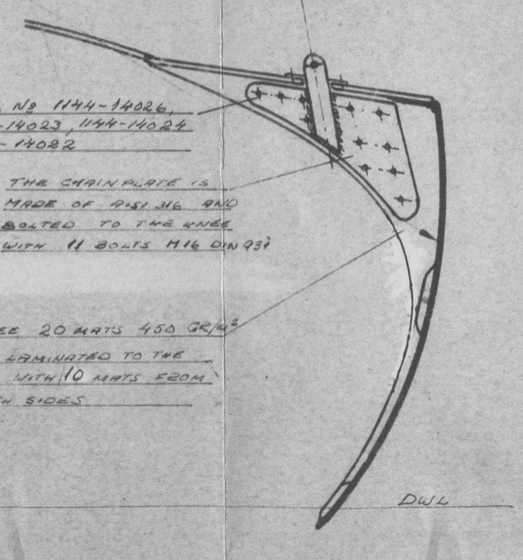

FWD LOWER CHAINPLATE

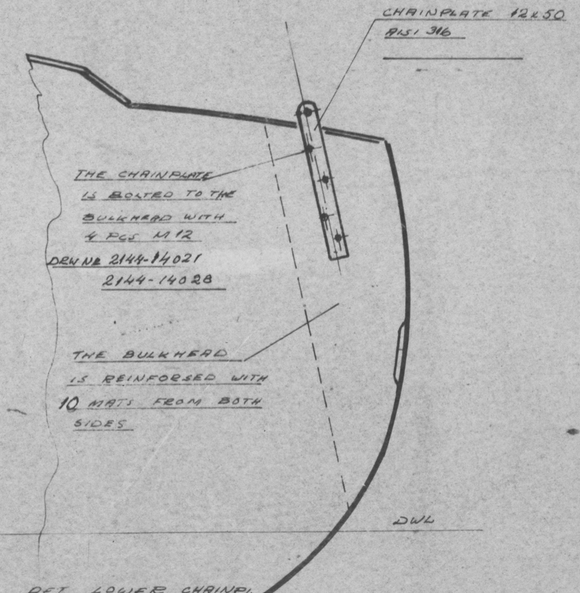

AFT LOWER CHAINPL